

REGLETAS RECONEXIÓN



MATERIAL


- Polipropileno, UL 94 V-2 retardante a la llama

TEMPERATURA DE TRABAJO

- Temperatura de trabajo 85° (IEC), 65° C/149° F (UL)

CARACTERÍSTICAS

- Terminales acero zincado
- Tornillos levantados de acero zincado
- Polos de fácil corte con la mano

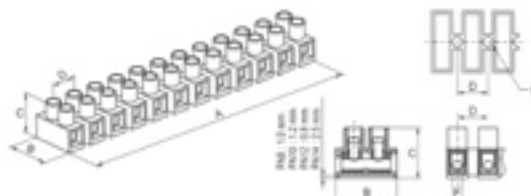

			Sección	mm						
				A	B	C	D	E	F	
10	500	□	2,5 mm ²	96,20	17,00	14,50	8,20	2,90	3,1±0,1	B 1104
		■								B 2104
10	500	□	6 mm ²	116,8	19,20	16,70	10,00	3,60	3,4±0,1	B 1106
		■								B 2106
10	400	□	10 mm ²	140,5	23,50	18,70	12,00	3,90	4,5±0,1	B 1110
		■								B 2110
10	200	□	16 mm ²	169,8	25,00	20,80	14,50	4,30	6,5±0,1	B 1116
		■								B 2116
5	200	□	25 mm ²	194,4	36,00	26,10	16,50	4,20	7,00±0,1	B 1125
		■								B 2125
10	100	□	35 mm ²	226,80	36,10	29,00	19,20	4,00	8,00±0,1	B 1135

Homologaciones IEC			Homologaciones UL		Referencia
  	450 V 24 A 2,5 mm ²		300 V 20 A #22-#12 Sol/Str	B 1104 + B 2104	
  	450 V 32 A 4 mm ²		300 V 25 A #22-#10 Sol #14-#10 Str	B 1106 + B 2106	
  	500 V 57 A 10 mm ²		300 V 30 A #18-#10 Sol #16-#10 Str	B 1110 + B 2110	
  	450 V 76 A 16 mm ²	-	-	B 1116 + B 2116	
  	750 V 101 A 25 mm ²	-	-	B 1125 + B 2125	